
BRIGHT SOURCE

Proctor

Made in Britain

The Proctor is a high-powered, high lumen output downlight. Made in the UK, the Proctor offers a high build quality and is feature rich. Depending on the variant, up to 116 lumens per circuit watt are achieved, the Proctor can also provide outputs up to 10300 lumens in total. Additionally, this luminaire has been CIBSE assessed and has been rated as "excellent circularity" and is supplied with Tridonic control gear. In high space areas, this is the perfect choice of luminaire to deliver the required light.

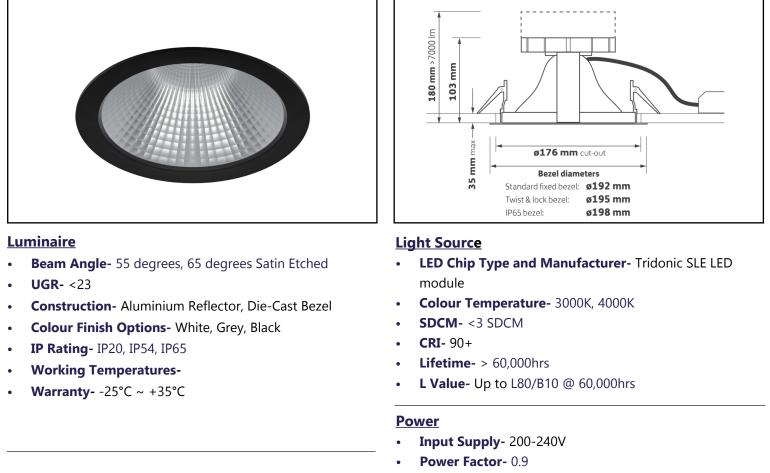


- Control Options- DALI, Bluetooth
- Mounting Options- Recessed, Plaster-In

- Efficacy- Up to 139lm/W
- Driver Manufacturer- Tridonic

Product Code	PRO/65W/7900/30K	PRO/94W/10025/30K	PRO/65W/8250/40K	PRO/94W/103/40K
Dimensions	3000K		4000K	
Wattage	65.5W	94.5W	65.5W	94.5W
Lumen Output	7900lm	10025lm	8250lm	10300lm

Product Code Builder

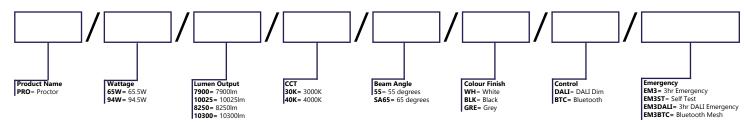

All technical data is subject to industry standard tolerances: ± 10%. BRIGHT SOURCE is constantly developing and improving its products and we therefore reserve the right to change any product specifications without prior notification. Photos provided are for illustrational purposes only. The exact appearance of the product may vary depending on the monitor settings, options selected and other factors.