


BRIGHT SOURCE

Platinum

Thales

Thales is a shallow, back lit luminaire delivering a uniform light. A variety of sizes and switchable wattages makes this a versatile luminaire suitable in a range of applications. With UGR<19, Thales can be used as part of schemes compliant with LG7 and EN12464-1. An efficacy of 150lm/W makes Thales a great choice for LED replacement schemes.

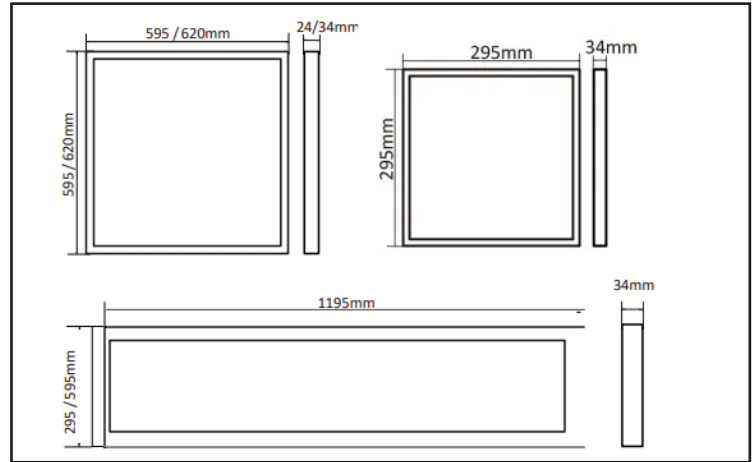

Luminaire

- **Beam Angle-** 120 degrees
- **UGR** <19
- **Construction-** High Strength Aluminum Alloy, Acrylic Diffuser
- **Colour Finish Options-** Black/White
- **Fire Rating-** TPa
- **IP Rating-** IP40
- **IK Rating-** IK08
- **Working Temperatures** -20°C - 45°C
- **Warranty-** 5 years

- **Control Options-** DALI, 1-10V, Casambi
- **Mounting Options-** Recessed, Surface Mounted

Light Source

- **LED Chip Type and Manufacturer-** Ebright SMD2835
- **Colour Temperature-** 3000K, 4000K, 5000K, 5700K, 6500K, 3-CCT Switchable
- **SDCM-** <5
- **CRI-** >90
- **Lifetime-** 125,000 Hours
- **L Value-** L80 B10 @ 97,000 Hours

Power

- **Input Supply-** AC200-240V
- **Power Factor-** >0.95%
- **Efficacy-** 150lm/W
- **Energy Rating-** D
- **Driver Manufacturer-** Tridonic

Product Code	THA/5x5/405/3CCT/120				THA/6x6/405/3CCT/120				THA/12x3/405/3CCT/120				THA/12x6/405/3CCT/120	
Dimensions	595 x 595				620 x 620				1195 x 295				1195 x 595	
Wattage (Switchable Power)	27W	32W	36W	40W	27W	32W	36W	40W	27W	32W	36W	40W	40W	57W
Lumen Output	4050	4800	5400	6000	4050	4800	5400	6000	4050	4800	5400	6000	6000	8550

Product Code Builder

