
# BRIGHT SOURCE

# Alphonsi

The Alphonsi offers a directional LED option thanks to the adjustable, tilting light modules. Suitable for use in high mounting applications, particularly in warehouses, storage aisles and work areas, the Alphonsi is supplied with two hanging brackets, two x 1 metre lengths of chain and a carabiner. With a steel construction and polycarbonate panel, the Alphonsi is built to last.



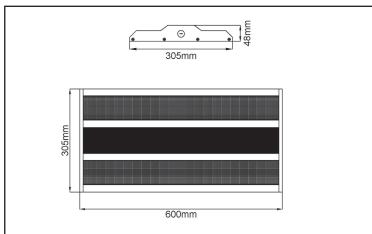

## **Luminaire**

- Beam Angle- 100 degrees
- Construction- Steel/Polycarbonate Panel
- Colour Finish Options- White
- IP Rating- IP20
- IK Rating-IK06
- Working Temperatures -- 40°C to +50°C
- Warranty- 5 Years
- Control Options- Non Dim, Mains Dim, DALI, Casambi, PIR
- Mounting Options- Suspended

## **Luminaire**

- LED Chip Type and Manufacturer- Lumileds 2835
- Colour Temperature- 5000K
- **SDCM** <6
- CRI- >80
- Lifetime- >50,000 Hrs
- L Value- L90 B10 @ 50,000 hours

#### **Power**

- Input Supply- 00-240VAC 50/60Hz
- Efficacy- 135lm/W
- Driver Manufacturer- SOSEN

Product Code	ALP/600/121/50K/100	ALP/600/148/50K/100	ALP/600/222/50K/100
Dimensions	600mm x 305mm x 48mm	600mm x 305mm x 48mm	600mm x 305mm x 48mm
Wattage	90W	110W	165W
Lumen Output	12,150lm	14,850lm	22,275lm

#### **Product Code Builder**

