
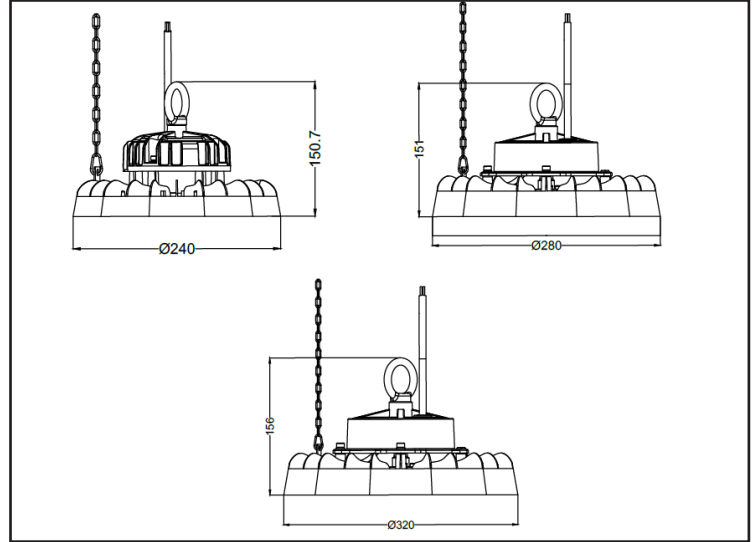


## Alden

The Alden Multibay is a high-efficiency, lightweight luminaire delivering up to 135lm/W. Its switchable wattage offers on-site flexibility, while IP65 and IK08 ratings ensure durability in demanding industrial and commercial settings. Ideal for warehouses, factories, and large indoor spaces.

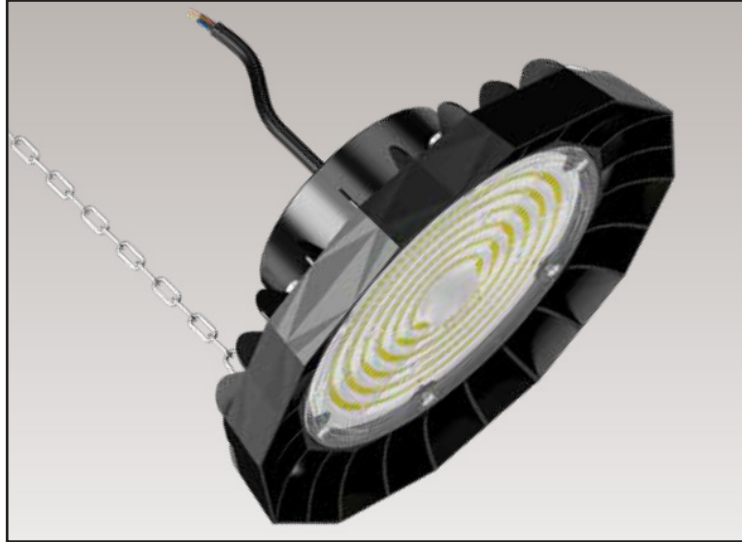

### Luminaire

- **Beam Angle-** 120 degrees
- **Construction-** Aluminium / Polycarbonate
- **Colour Finish Options-** Black
- **IP Rating-** IP65
- **IK Rating-** IK08
- **Working Temperatures-** -20°C to +40°C
- **Warranty-** 5 Years

### Luminaire

- **LED Chip Type and Manufacturer-** Philips SMD 3030
- **Colour Temperature-** 5000K
- **SDCM-** <6
- **CRI-** >80
- **Lifetime-** >50,000 Hrs
- **L Value-** L 70 @ 50,000 hours

### Power

- **Input Supply-** 220-240V
- **Efficacy-** 135lm/W
- **Energy Rating-** D
- **Driver Manufacturer-** ZHIHE

- **Control Options-** DALI, 1-10V, Casambi, PIR, Microwave
- **Mounting Options-** Surface mounted/ Suspended

Product Code	ALD/240/60SW/VAR	ALD/300/90SW/VAR	ALD/345/140SW/VAR
Dimensions	240 x 150	300 x 149	345 x 152
Wattage	60W/80W/100W	90W/120W/150W	140W/200W/240W
Lumen Output	8100lm/10800lm/13500lm	12150lm/16200lm/20250lm	18900lm/27000lm/32400lm

### Product Code Builder

Product Name	Size	Wattage	Lumen Output	CCT	Colour Finish	Control	Emergency
ALD = Alden	240 = 240 x 150mm 300 = 300 x 149mm 345 = 345 x 152mm	60SW = 60W/80W/100W 90SW = 90W/120W/150W 140SW = 140W/200W/240W	VAR = Variable	50K = 5000K	BLK = Black	DIM = Mains Dim DALI = DALI Dim BTC = Bluetooth	EM3 = 3hr Emergency EM3ST = Self Test EM3DALI = 3hr DALI Emergency EM3BTC = Bluetooth Mesh