
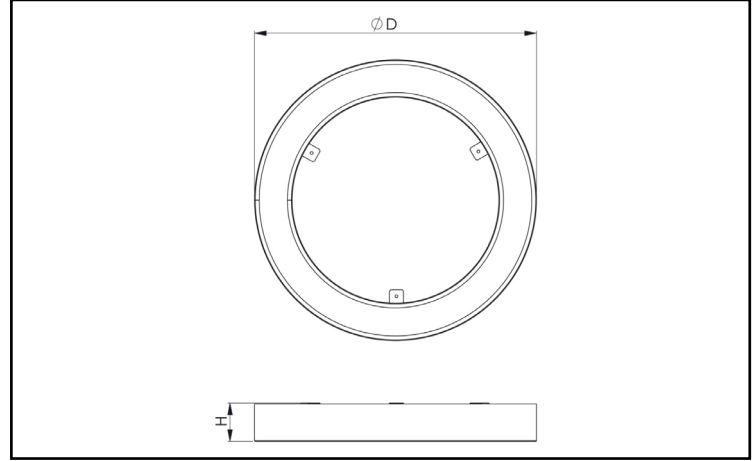


## Cassini O

Cassini O is a decorative suspended ring luminaire offering direct or direct/indirect light distribution. Available with opal or microprismatic diffusers, it combines performance with elegance. Offered in a variety of sizes and custom RAL colours, it's ideal for feature lighting in modern interiors.

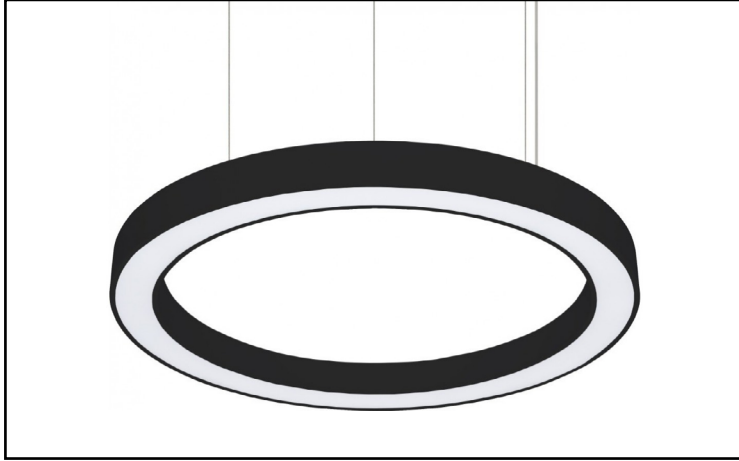

### Luminaire

- Beam Angle-** 105°, Direct/Indirect
- Construction-** Steel housing with opal PMMA diffuser or matt micro-prismatic polycarbonate diffuser, UV stabilized
- Colour Finish Options-** White, Black, Custom RAL
- IP Rating-** IP40
- Working Temperatures-** ta 0°...+35°
- Warranty-** 5 Years

### Light Source

- Colour Temperature-** 3000K, 4000K
- SDCM-** 3
- CRI-** 80+
- Lifetime-** 50,000hrs
- L Value-** L80/B10 @ 50,000hrs

### Power

- Input Supply-** 220-240V, 0/50/60Hz
- Power Factor-** 0.92
- Efficacy-** up to 126lm/W
- Energy Rating-** E

- Control Options-** On/Off, DALI, Smart Sensor, Bluetooth
- Mounting Options-** Suspended

Lumen values shown are based on 3000K with an opal diffuser. Performance may vary with other specifications.

Dimensions	600 x 600 x 80			900 x 900 x 80			1200 x 1200 x 80		
Wattage	16.9W	23.6W	34.6W	26.4W	37.7W	54.9W	34.8W	49.8W	72.4W
Lumen Output	1924lm	2621lm	3603lm	3148lm	4289lm	5896lm	4197lm	5719lm	7861lm

### Product Code Builder

<b>Product Name</b> CASO-Cassini O	<b>Size</b> 600= 600 x 600 x 80 900= 900 x 900 x 80 1200= 1200 x 1200 x 80	<b>Wattage</b> 16.9W=16.9W 23.6W= 23.6W 34.6W= 34.6W 26.4W= 26.4W 37.7W= 37.7W 54.9W= 54.9W 34.8W= 34.8W 49.8W= 49.8W 72.4W= 72.4W	<b>CCT</b> 30K= 3000K 40K= 4000K	<b>Distribution</b> MPRZ= Microprismatic OP= Opal DIN= Direct/Indirect	<b>Colour Finish</b> WH= White RAL= Custom RAL	<b>Control</b> DIM= Mains Dim DALI= DALI Dim SS= Smart Sensor BTC= Bluetooth	<b>Emergency</b> EM3= 3hr Emergency EM3ST= Self Test EM3DALI= 3hr DALI Emergency EM3BTC= Bluetooth Mesh	