


Orowan C

Orowan C is a durable, high-performance luminaire designed specifically for cornice mounting in secure and high-risk environments. With an IK10+ impact rating, IP65 protection, and a UV-stable, vandal-resistant housing, it offers long-lasting reliability. Available in a range of sizes and wattages, it provides flexible, tamper-resistant lighting for public areas, transport hubs, and custodial settings.

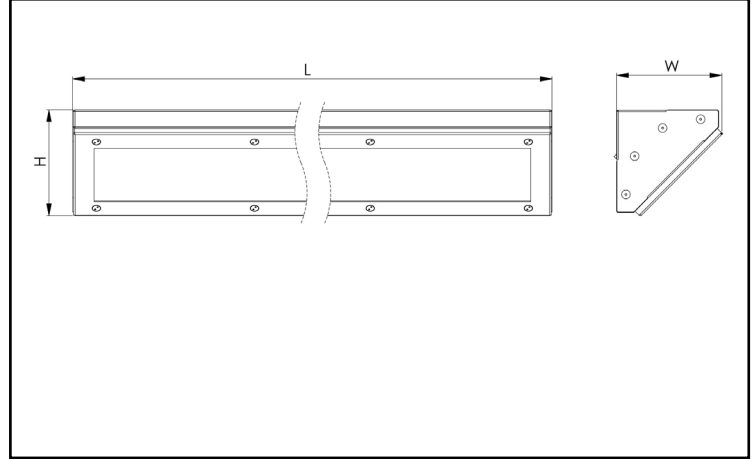

Luminaire

- Beam Angle-** Asymmetrical
- Construction-** Zinc-plated steel housing with opal polycarbonate diffuser, UV stable, vandal resistant, frame with stainless-steel security screws
- Colour Finish Options-** White, Custom RAL
- IP/IK Rating-** IP65 / IK10+
- Working Temperatures-** -20...+40
- Warranty-** 5 Years

- Control Options-** On/Off, DALI, Microwave, Microwave+DALI
- Mounting Options-** Surface Cornice

Light Source

- Colour Temperature-** 3000K, 4000K
- SDCM-** 3
- CRI-** 80+
- Lifetime-** 100,000hrs
- L Value-** L80B10 @100,000hrs

Power

- Input Supply-** 220-240V, 0/50/60Hz
- Power Factor-** >0.90
- Efficacy-** Up to 130lm/W
- Energy Rating-** D

Lumen values based on 3000K. Lumen values of 4000K will differ.

Dimensions (mm)	380 x 135 x 65		660 x 135 x 65			940 x 135 x 65			1220 x 135 x 65			1500 x 135 x 65			
Wattage	10.2W	12.8W	13.7W	18.8W	21.8W	20.1	27.6	32.4	24.5	32.7	43.3	30.6	40.8	45.5	54.1
Lumen Output	1162lm	1468lm	1598lm	2214lm	2751lm	2398lm	3321lm	3998lm	2953lm	4429lm	5331lm	3691lm	5023lm	5507lm	6663lm

Product Code Builder

	/		/		/		/		/		/	
Product Name ORO= Orowan		Size 380=380 x 135 x 65 660=660 x 135 x 65 940=940 x 135 x 65 1220=1220 x 135 x 65 1500=1500 x 135 x 65		Wattage 10.2W= 10.2W 12.8W= 12.8W 13.7W= 13.7W 18.8W= 18.8W 21.8W= 21.8W 20.1W= 20.1W 27.6W= 27.6W 32.4W= 32.4W 24.5W= 24.5W 32.7W= 32.7W 43.3W= 43.3W 30.6W= 30.6W 40.8W= 40.8W 54.1W= 54.1W		CCT 30K= 3000K 40K= 4000K		Colour Finish WH= White RAL= Custom RAL		Control DIM= Mains Dim DALI= DALI Dim MW= Microwave MWDA= Microwave+DALI BTC= Bluetooth		Emergency EM3= 3hr Emergency EM3ST= Self Test EM3DALI= 3hr DALI Emergency EM3BTC= Bluetooth Mesh