


Orowan R

Orowan is a tough, high-performance luminaire designed for challenging environments. With an IK10+ impact rating, IP65 protection, and a UV-stable, vandal-resistant body, it ensures long-lasting durability. Available in a range of sizes, mounting types and wattages to suit various applications, it's ideal for public spaces, transport hubs, and secure facilities.

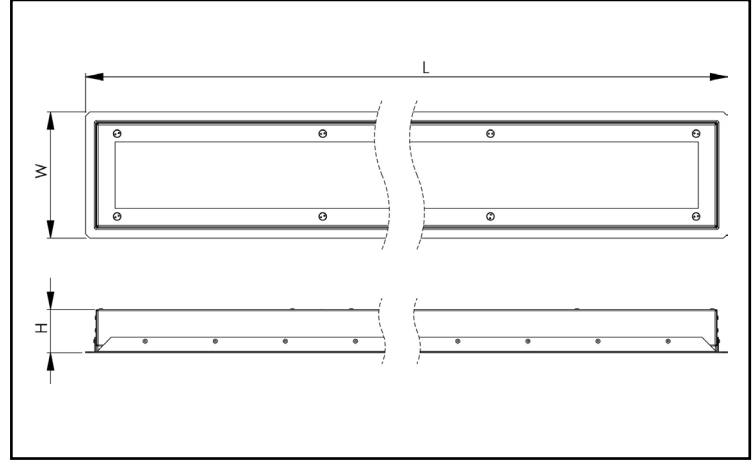

Luminaire

- Beam Angle-** 106 ° x106 °
- Construction-** Zinc-plated steel housing with opal polycarbonate diffuser, UV stable, vandal resistant, frame with stainless-steel security screws
- Colour Finish Options-** White, Custom RAL
- IP/IK Rating-** IP65 / IK10+
- Working Temperatures-** -20...+40
- Warranty-** 5 Years

- Control Options-** On/Off, DALI, Microwave, Microwave+DALI
- Mounting Options-** Recessed

Lumen values based on 3000K. Lumen values of 4000K will differ.

Dimensions (mm)	410 x 180 x 65		690 x 180 x 65			970 x 180 x 65			1250 x 180 x 65			1530 x 180 x 65			
Wattage	10.2W	12.8W	13.7W	18.8W	21.8W	20.1	27.6	32.4	24.5	32.7	43.3	30.6	40.8	45.5	54.1
Lumen Output	1162lm	1468lm	1598lm	2214lm	2751lm	2398lm	3321lm	3998lm	2953lm	4429lm	5331lm	3691lm	5023lm	5507lm	6663lm

Product Code Builder

	/		/		/		/		/		/	
Product Name OROR= Orowan R		Size 410=380 x 180 x 65 690=660 x 180 x 65 970=940 x 180 x 65 1250=1220 x 180 x 65 1530=1500 x 180 x 65		Wattage 10.2W= 10.2W 12.8W= 12.8W 13.7W= 13.7W 18.8W= 18.8W 21.8W= 21.8W 20.1W= 20.1W 27.6W= 27.6W 32.4W= 32.4W 24.5W= 24.5W 32.7W= 32.7W 43.3W= 43.3W 30.6W= 30.6W 40.8W= 40.8W 54.1W= 54.1W		CCT 30K= 3000K 40K= 4000K		Colour Finish WH= White RAL= Custom RAL		Control DIM= Mains Dim DALI= DALI Dim MW= Microwave MWDA= Microwave+DALI BTC= Bluetooth		Emergency EM3= 3hr Emergency EM3ST= Self Test EM3DALI= 3hr DALI Emergency EM3BTC= Bluetooth Mesh