


Orowan W

Orowan is a rugged, wall-mounted luminaire built for high-risk and demanding environments. With an IK10+ impact rating, IP65 protection, and a UV-stable, vandal-resistant housing, it ensures reliable, long-term performance. Available in various sizes and wattages, Orowan is ideal for secure facilities, public buildings, and transport hubs where durability and safety are essential.

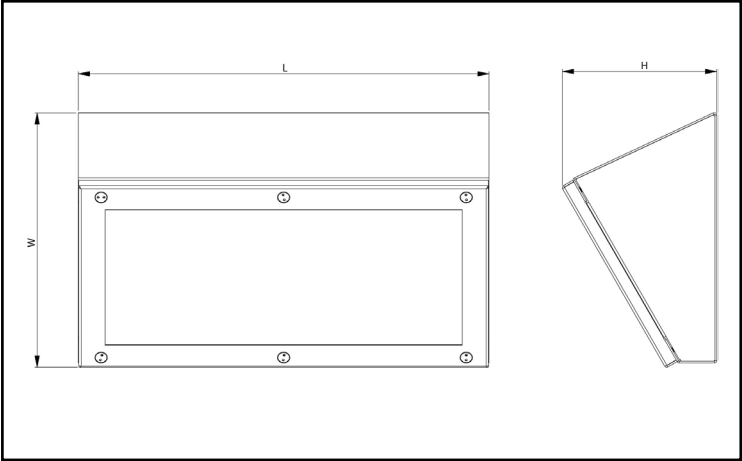

Luminaire

- Beam Angle-** Asymmetrical
- Construction-** Zinc-plated steel housing with opal polycarbonate diffuser, UV stable, vandal resistant, frame with stainless-steel security screws
- Colour Finish Options-** White, Custom RAL
- IP/IK Rating-** IP65 / IK10+
- Working Temperatures-** -20...+40
- Warranty-** 5 Years

- Control Options-** On/Off, DALI, Microwave, Microwave+DALI
- Mounting Options-** Wall Mounted

Light Source

- Colour Temperature-** 3000K, 4000K
- SDCM-** 3
- CRI-** 80+
- Lifetime-** 100,000hrs
- L Value-** L80B10 @100,000hrs

Power

- Input Supply-** 220-240V, 0/50/60Hz
- Power Factor-** >0.90
- Efficacy-** Up to 130lm/W
- Energy Rating-** E

Dimensions (mm)	380 x 110 x 150			
Wattage	10.2W		12.8W	
Lumen Output	1146lm	1448lm	1208lm	1526lm

Product Code Builder

Product Name
OROW= Orowan W

Wattage
10.2W=10.2W
12.8W=12.8W

Lumen Output
1146=1146lm
1448=1448lm
1208=1208lm
1526=1526lm

CCT
30K= 3000K
40K= 4000K

Colour Finish
WH= White
RAL= Custom RAL

Control
DIM= Mains Dim
DALI= DALI Dim
MW=Microwave
MWDA= Microwave+DALI
BTC= Bluetooth

Emergency
EM3= 3hr Emergency
EM3ST= Self Test
EM3DALI= 3hr DALI Emergency
EM3BTC= Bluetooth Mesh