


The Wooley is a decorative, LED pendant with an inbuilt LED light source. Available in a range of colours finishes and with a wide range of beam angles and outputs, the Wooley provides a unique style suitable for a diverse range of applications.

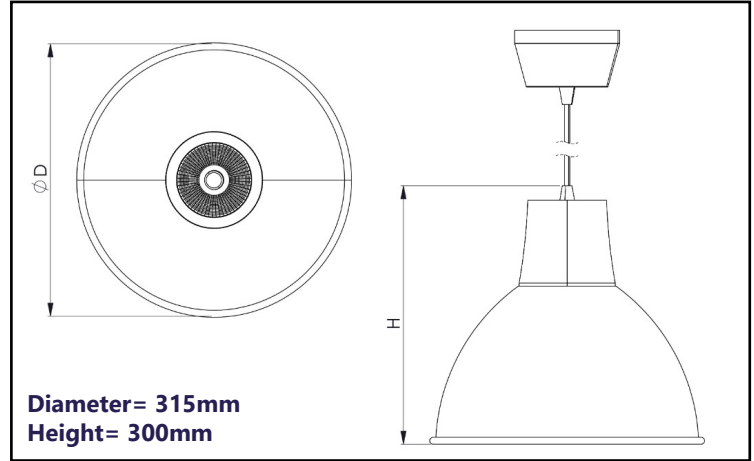

Luminaire

- **Beam Angle-** 15°, 24°, 32°, 60°
- **Construction-** Aluminium housing with faceted aluminium reflector, clear PMMA diffuser
- **Colour Finish Options-** Black, White, Custom RAL
- **IP Rating-** IP20
- **Working Temperatures-** ta 0...+35
- **Warranty-** 5 years

- **Control Options-** On/Off, DALI
- **Mounting Options-** Suspended

Light Source

- **Colour Temperature-** 3000K, 4000K
- **SDCM-** 3
- **CRI-** 80+
- **Lifetime-** 60000hrs
- **L Value-** L80B10 @ 60000hrs

Power

- **Input Supply-** 220-240V, 0/50-60Hz
- **Power Factor-** 0.92
- **Efficacy-** up to 109lm/W
- **Energy Rating-** E

Product Code	WOL/13.4/1381/30K	WOL/19.5/1879/30K	WOL/27.1/2525/30K	WOL/35.1/3167/30K	WOL/32.1/3620/30K	WOL/13.4/1459/40K	WOL/19.5/1983/40K	WOL/27.1/2669/40K	WOL/35.1/3348/40K	WOL/32.1/3620/30K
Colour temp	3000K					4000K				
Wattage	13.4	19.5	27.1	35.1	42.1	13.5	19.5	27.1	35.1	42.1
Lumen Output	1381	1879	2525	3167	3620	1459	1983	2669	3348	3824

Product Code Builder

Product Name	Wattage	Output	CCT	CRI	Beam Angle	Colour Finish	Control	Mounting
WOL= Wooley	13.4W= 13.4W 19.5W= 19.5W 27.1W= 27.1W 35.1W= 35.1W 42.1W= 42.1W	1381= 1381lm 1459= 1459lm 1879= 1879lm 1983= 1983lm 2525= 2525lm 2669= 2669lm 3167= 3167lm 3348= 3348lm 3620= 3620lm 3824= 3824lm	20K= 2000K 25K= 2500K 27K= 2700K 30K= 3000K 31K= 3100K 32K= 3200K 40K= 4000K	80= 80+	15= 15 degrees 24= 24 degrees 32= 32 degrees 60= 60 degrees	BLK= Black WH= White RAL= Custom RAL	ON= ON/OFF DALI= DALI	SUS= Suspended TRK= Track