


Alden

The Alden is suitable for use in high or low bay applications. Offering a high efficacy, it is ideal for use in high mounting spaces such as warehouses, factories, industrial units or sports halls. This multi-bay fitting is complete with a hanging eye bolt and safety cable, has a dimmable driver and uses Philips SMD 303 LED chips.

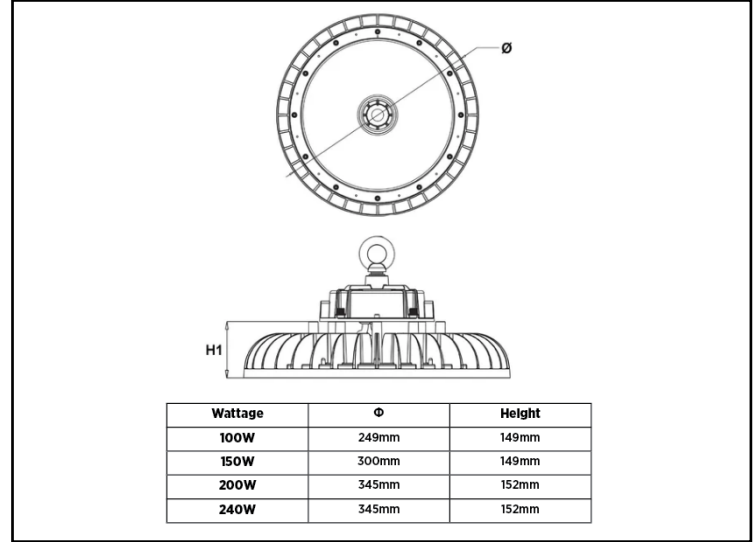

Luminaire

- **Beam Angle-** 120 degrees
- **Construction-** Aluminium / Polycarbonate
- **Colour Finish Options-** Black
- **IP Rating-** IP65
- **IK Rating-** IK08
- **Working Temperatures-** -20°C to +40°C
- **Warranty-** 5 Years

Luminaire

- **LED Chip Type and Manufacturer-** Philips SMD 3030
- **Colour Temperature-** 5000K
- **SDCM-** <6
- **CRI-** >80
- **Lifetime-** >50,000 Hrs
- **L Value-** L 70 @ 50,000 hours

Power

- **Input Supply-** 220-240V
- **Efficacy-** 135lm/W
- **Energy Rating-** D
- **Driver Manufacturer-** ZHIHE

- **Control Options-** DALI, 1-10V, Casambi, PIR, Microwave
- **Mounting Options-** Surface mounted/ Suspended

Product Code	ALD/249/135/50K/120	ALD/300/202/50K/120	ALD/345/270/50K/120	ALD/345/324/50K/120
Dimensions	249 x 149	300 x 149	345 x 152	345 x 152
Wattage	100W	150W	200W	250W
Lumen Output	13500lm	20250lm	27000lm	32400lm

Product Code Builder

