


BRIGHT SOURCE

Platinum

Halley

The Halley is a Bright Source architectural, low-glare UK manufactured downlight, providing excellent consistency across the whole beam width. With a matt black baffle for minimum glare, a precision moulded 40 degree reflector, a thermally optimised, die-cast heat sink and Tridonic gearing as standard, the Halley is built to the highest standards.

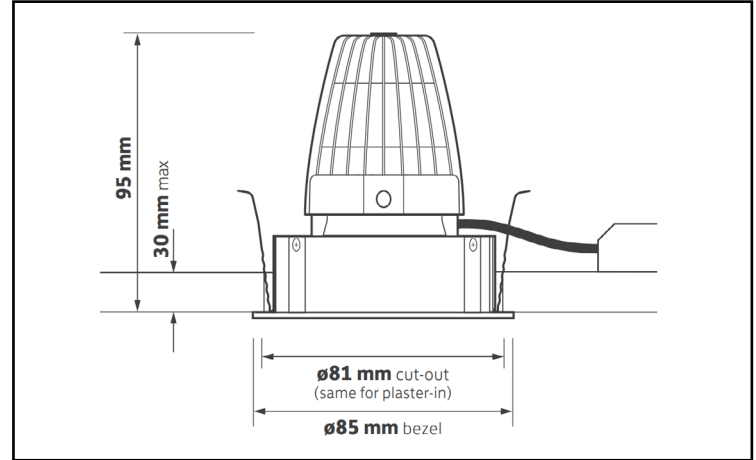

Luminaire

- **Beam Angle-** 40 degrees
- **UGR** <15
- **Construction-** Bezel die-cast from pure aluminium
- **Colour Finish Options-** Black, White
- **IP Rating-** IP44
- **Working Temperatures** -25°C - 25°C
- **Warranty-** 5 years

Light Source

- **LED Chip Type and Manufacturer-** Tridonic
- **Colour Temperature-** 2700K, 3000K, 4000K
- **SDCM-** 3
- **CRI-** >80
- **Lifetime-** >55,000 hrs
- **L Value-** L90 @ 55,000 hrs


Power

- **Input Supply-** 200-240V
- **Efficacy-** >66lm/W
- **Driver Manufacturer-** Tridonic

- **Control Options-** DALI, Mains DIM, Casambi
- **Mounting Options-** Recessed

Product Code	HAL/85/600/27K	HAL/85/850/27K	HAL/85/675/30K	HAL/85/850/30K	HAL/85/700/40K	HAL/85/900/40K
Colour Temp	2700K		3000K		4000K	
CRI	90Ra		80Ra		80Ra	
Wattage	8W	10W	6.5W	8W	6.5W	8W
Lumen Output	600lm	850m	675lm	850lm	700lm	900lm

Product Code Builder

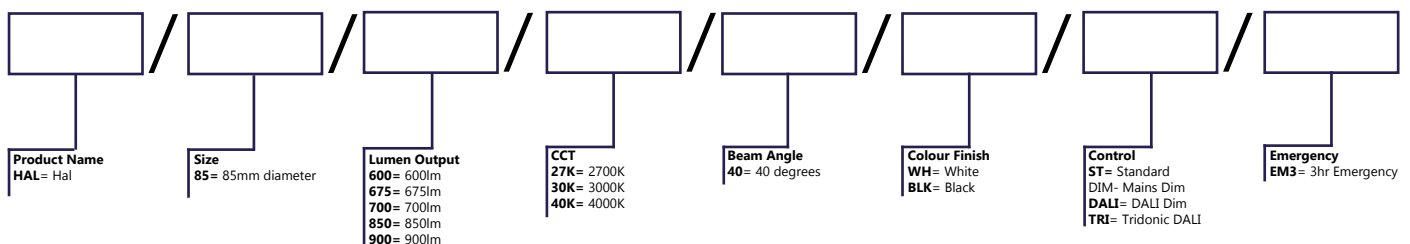

All technical data is subject to industry standard tolerances: ±10%. BRIGHT SOURCE is constantly developing and improving its products and we therefore reserve the right to change any product specifications without prior notification. Photos provided are for illustrational purposes only. The exact appearance of the product may vary depending on the monitor settings, options selected and other factors.

