
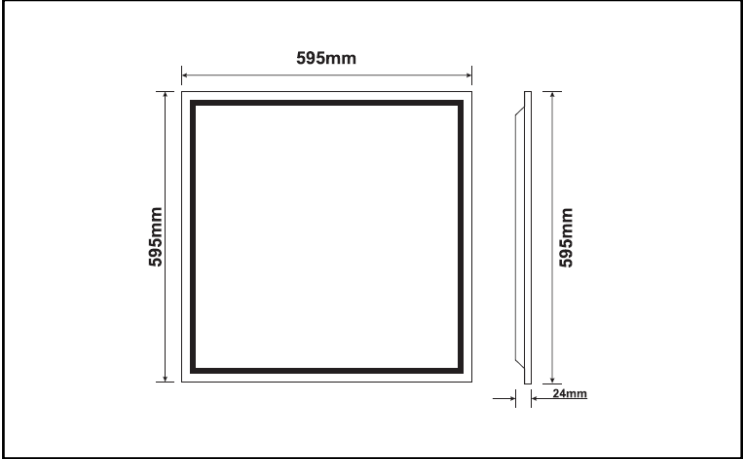


Mesmer

The Mesmer is a high-performance 600x600 LED panel delivering 135lm/W with a low-glare rating of UGR<19. TP(a) rated for safety and versatility, it can be recessed, suspended, or surface mounted—ideal for offices, schools, and commercial spaces.

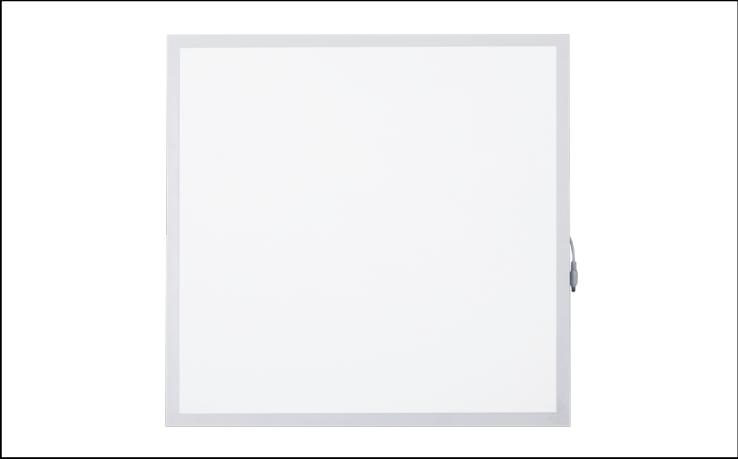

Luminaire

- **Beam Angle-** 90 degrees
- **UGR** <19
- **Construction-** PS Prismatic (TPA) diffuser, Steel frame
- **Colour Finish Options-** Black, White, Custom
- **Fire Rating-**TPa
- **IP Rating-** IP20
- **Working Temperatures** -20°C - +40°C
- **Warranty-** 5 years

Light Source

- **LED Chip Type and Manufacturer-** SANAN
- **Colour Temperature-** 3000K, 4000K, 6000K
- **SDCM-** <6
- **CRI-** >80
- **Lifetime-** 50,000 Hours
- **L Value-** L80 B10 @ 50,000 Hours

Power

- **Input Supply-** AC200-240V
- **Power Factor-** >0.9%
- **Efficacy-** 135lm/W
- **Energy Rating-** D
- **Driver Manufacturer-** AGT

- **Control Options-** Non Dim, Mains Dim, DALI, Casambi
- **Mounting Options-** Recessed, Surface Mounted

Product Code	MES/30W/VAR/3CCT/90
Dimensions	595 x 595
Colour Temp	3000K / 4000K / 6000K
Lumen Output	4050lm

Product Code Builder

Product Name
MES= Mesmer

Wattage
30W= 30W

Lumen Output
VAR= Variable

CCT
3CCT= 3CCT Switch

Beam Angle
90= 90 degrees

Colour Finish
WH= White
BLK= Black

Control
DIM=Dimmable
DALI= DALI Dim
TRI= Tridonic DALI
BTC= Bluetooth

Emergency
EM3= 3hr Emergency
EM3ST= Self Test
EM3DALI= 3hr DALI Emergency
EM3BTC= Bluetooth Mesh